

## LEVELING MOUNTS


### NVS Series

NVS mounts are specifically designed for compression loads applications, where leveling is required. Precision fitted neoprene inserts provide maximum dampening of shock and prevents transfer of vibration from equipment to support structures. Shear load should not exceed 10% of the maximum vertical load.

### Recommended for:

NVS mounts are used for lathe and milling machines, punch presses, heavy duty printing machinery, shears, brakes, injection molding machines, and grinders.

Model	Non-Impact Machinery (lbs)	Impact Machinery (lbs)	Dimensions in inches			
			D	H	Bolt Size	L (Level Adj.)
NVS-1-50	750	500	3-5/16	1-1/2	1/2-13 UNC X 6	3/8
NVS-1-70	1,500	1,000	3-5/16	1-1/2	1/2-13 UNC X 6	3/8
NVS-2-50	3,000	2,000	5-5/8	1-7/8	5/8-11 UNC X 8	1/2
NVS-2-70	4,500	3,000	5-5/8	1-7/8	5/8-11 UNC X 8	1/2
NVS-3-50	10,000	6,700	9	2-1/2	1-14 UNF X 8	5/8
NVS-4-70	15,000	10,000	9	2-1/2	1-14 UNF X 8	5/8

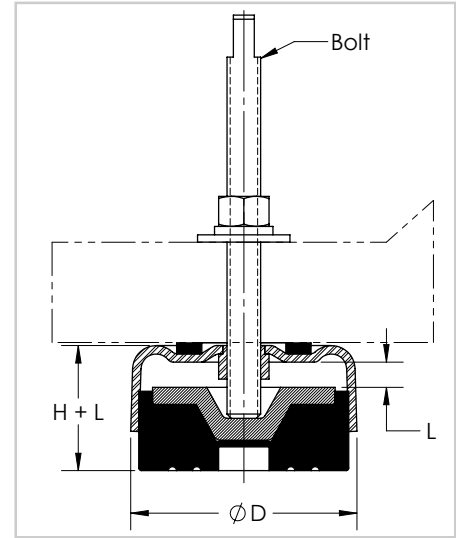

### Features:

- ✓ Built-in leveling device enables quick, easy and precise leveling of machinery.
- ✓ Effectively dampens vertical and horizontal forces.
- ✓ Controls vibration and noise.
- ✓ Circular grooves on elastomer insert's base firmly anchor machine to the floor, preventing creeping or walking.
- ✓ Resistant to most oils and cleaning compounds.
- ✓ Economical, durable and saves on installation cost.

