

## CEILING HANGERS

E1, E2, E3 Series ceiling hangers are economical alternatives to other types of hangers to isolate vibration from the suspended structure to the building.


### Recommended for:

All ceiling hangers are used in installation of: fans, A/C, pipes, ducts, transformers, air compressors, pumps, power boxes, and other suspended equipment.




### Features:

- ✓ Black elastomer element has vulcanized steel washers for uniform load distribution.
- ✓ Economical alternative to other type of plate ceiling hangers.
- ✓ Fast and simple installation.
- ✓ Reduces transfer vibration and noise.

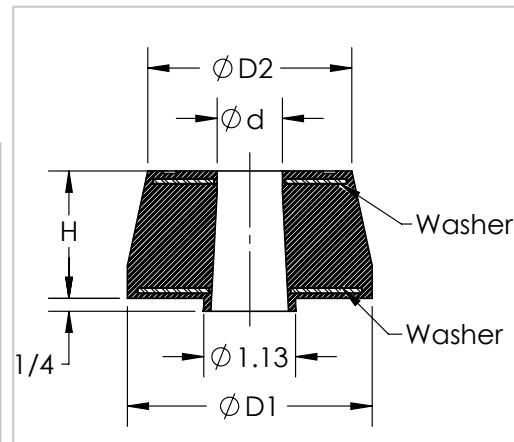

### Typical Installation

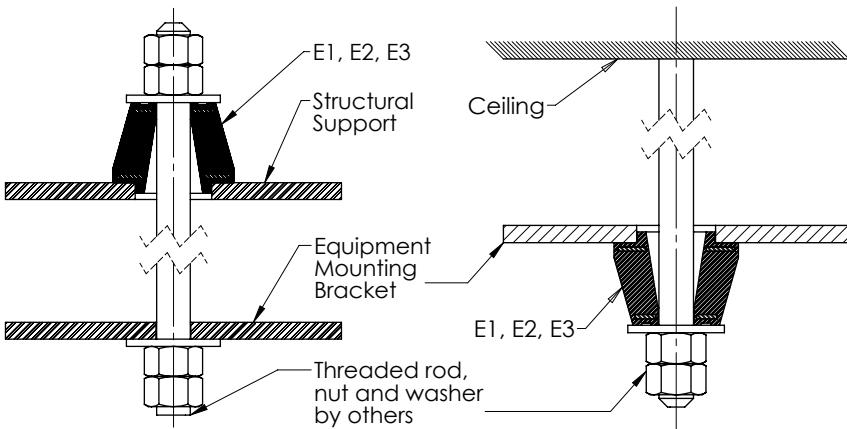

| Model | Maximum Load (lbs) | Deflection at Max Load (in) | Dimensions in inches |     |      |     |
|-------|--------------------|-----------------------------|----------------------|-----|------|-----|
|       |                    |                             | D1                   | D2  | H    | d   |
| E1-40 | 60                 | .12                         | 1.8                  | 1.3 | 1.18 | .52 |
| E1-60 | 150                | .12                         | 1.8                  | 1.3 | 1.18 | .52 |
| E1-80 | 225                | .12                         | 1.8                  | 1.3 | 1.18 | .52 |
| E2-40 | 200                | .15                         | 2.4                  | 2   | 1.5  | .65 |
| E2-60 | 450                | .15                         | 2.4                  | 2   | 1.5  | .65 |
| E2-80 | 800                | .15                         | 2.4                  | 2   | 1.5  | .65 |
| E3-40 | 400                | .16                         | 3                    | 2.5 | 1.58 | .82 |
| E3-60 | 850                | .16                         | 3                    | 2.5 | 1.58 | .82 |
| E3-80 | 2,000              | .16                         | 3                    | 2.5 | 1.58 | .82 |

