







100 Series SPRING MOUNT

FEATURES:

The **100 Series** Mounts are housed steel spring isolators with light castings for shock and structural born noise isolation. The closed housing makes the **100 series Mounts** ideal for applications where horizontal movement needs to be kept to a minimum. A standard noise insulation layer prevents steel to steel contact. Neoprene base pad available for additional high frequency isolation and more compensation for uneven floors.



- Low natural frequency.
- Quick and easy installation.
- Compensates for uneven floors.
- Load ranges from 18 lbs to 1250 lbs
- Suitable for Ventilation units, fans, HVAC units, etc.
- Closed Spring

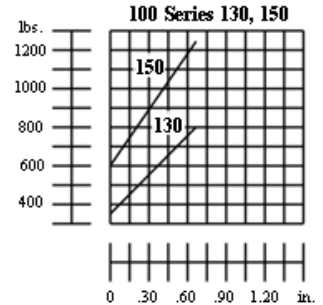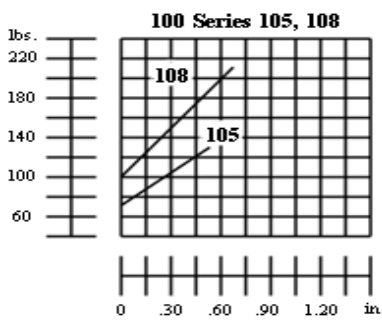

Product Code	Min. Load (lbs)	Max. Load (lbs)	Length of base (ins)	Width of Base (ins)	Between Holes (ins)	Height (ins)	Thread
V 101	17	30	5-1/8	2-3/4	3.925	2-3/4	M10
V 103	30	80	5-1/8	2-3/4	3.925	2-3/4	M10
V 105	65	135	5-1/8	2-3/4	3.925	2-3/4	M10
V 108	100	200	5-1/8	2-3/4	3.925	2-3/4	M10
V 112	170	340	5-7/8	3-1/4	4.725	3-5/8	M12
V 120	250	500	5-7/8	3-1/4	4.725	3-5/8	M12
V 130	335	790	5-7/8	3-1/4	4.725	3-5/8	M12
V 150	615	1240	5-7/8	3-1/4	4.725	3-5/8	M12