




B Series **LEVELING FEET**



VibraSystems steel leveling feet are ball and socket type mounts that can be used for light, medium and heavy duty applications. These mounts are available with a stud or in a tapped in thread style. The **B series** swivel base will move up to 10*-15* to compensate for uneven floors. The **B series** are available in yellow zinc (clear zinc, nickel or black oxide optional). VibraSystems also offers these mounts with a non-skid elastomer pad.

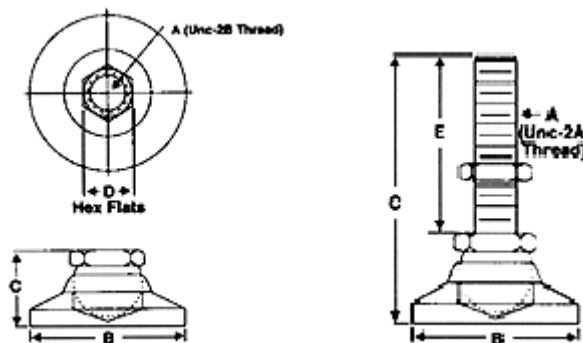

** Also Available In Stainless Steel!
(min. 100 pcs quantity orders only)*

SPECIAL FEATURES:

- Standard threads sizes from 10-32 to 1 1/4-7
- Metric threads from M-6 to M-30
- Levels on uneven floor
- Quick and easy leveling
- All studs furnished with jam nuts
- Available with lag holes
- Available with non-skid pads

STUD TYPES:

Product Code	Stud Type				Max Load (lbs)
	B (in)	Thread (A)	E (in)	C (in)	
BLA-025	1	1/4-20	2-1/2	3-13/64	1000
BLA-037	1-1/4	3/8-16	4	4-7/8	3750
BLA-050	1-7/8	1/2-13	4	5-1/8	5000
BLA-062	2-1/2	5/8-11	4	5-1/4	6000
BLA-075	3	3/4-10	4	5-1/2	7400
BLA-100	4	1-8	4-1/4	6-1/8	20000

TAPPED TYPE:

Product Code	Tapped Type			Max Load (lbs)
	B (in)	Thread	C (in)	
BTA-025	1	1/4-20	45/64	1000
BTA-037	1-1/4	3/8-16	7/8	3750
BTA-050	1-7/8	1/2-13	1-1/8	5000
BTA-062	2-1/2	5/8-11	1-1/4	6000
BTA-075	3	3/4-10	1-1/2	7400
BTA-100	4	1-8	1-7/8	21000

STUD TYPE METRIC:

Product Code	Stud Type Metric				Max Load (lbs)
	B (mm)	Thread (A)	E (mm)	C (mm)	
BLM-06	19	M6	25	38.8	317
BLM-08	25.5	M8	31	49.6	453
BLM-10	31.7	M10	51	73	1701
BLM-12	47.6	M12	51	79	2268
BLM-16	63.5	M16	51	82.5	2721
BLM-20	76	M20	51	89	3357
BLM-24	101	M24	88	136	9072

TAPPED TYPE METRIC:

Product Code	Tapped Type Metric			Max Load (lbs)
	B (mm)	Thread (A)	C (mm)	
BTM-06	19	M6	13.5	317
BTM-08	25.5	M8	17.8	453
BTM-10	31.7	M10	22	1701
BTM-12	47.6	M12	28.5	2268
BTM-16	63.5	M16	31.7	2721
BTM-20	76	M20	38	3357
BTM-24	101	M24	47.6	9072