


OSM-1-150 Series SPRING MOUNTS 1" Deflection

OSM Series spring mounts are unhoused, laterally stable steel springs welded to the top and bottom steel plates. The upper load plate includes a leveling bolt assembly. The lower steel plate features a neoprene acoustical friction pad. Mounting holes are provided on all mounts. These spring mounts have a built leveling device. The Springs are galvanized for long operation life without any rusting problems and are color coded for easy field identification. Springs have a 50% additional travel to solid load as per ASHRAE recommendations. These spring mounts are recommended where both horizontal and vertical stability are required. In general these series spring mounts are used for vibration & noise control applications such as pumps, centrifugal fans, air handling units, air compressors and for similar applications.

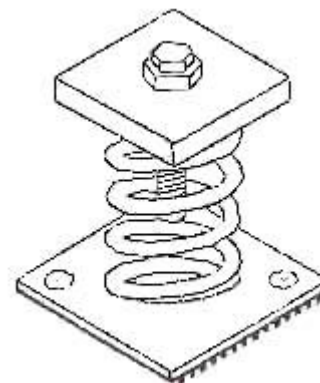

ISOLATOR MODEL	RATED LOAD (LBS)	SOLID LOAD (LBS)	DEFLECTION AT SOLID LOAD (INCH)	COLOR	
				MAIN	STRIPE
OSM-1-150	83	125	1.3	SILVER	BROWN
OSM-1-151	150	225	1.3	SILVER	ORANGE
OSM-1-152	216	325	1.2	SILVER	GREEN
OSM-1-153	300	450	1.2	SILVER	RED
OSM-1-154	400	600	1.2	SILVER	BLACK
OSM-1-155	500	750	1.1	SILVER	WHITE
OSM-1-156	600	900	1.0	SILVER	GRAY
OSM-1-157	733	1100	0.9	SILVER	BLUE
OSM-1-158	1200	1800	1.0	SILVER	GOLD
OSM-1-159	1666	2500	1.0	SILVER	NIL
OSM-1-150-161	481	722	1.0	SILVER	BROWN
OSM-1-151-161	532	799	1.0	SILVER	ORANGE
OSM-1-152-161	597	896	1.0	SILVER	GREEN
OSM-1-153-161	666	1000	1.0	SILVER	RED
OSM-1-154-161	750	1125	1.0	SILVER	BLACK
OSM-1-155-161	871	1307	1.0	SILVER	WHITE
OSM-1-156-161	1016	1525	1.0	SILVER	GRAY
OSM-1-157-161	1108	1663	0.9	SILVER	BLUE
OSM-1-158-161	1616	2425	1.0	SILVER	GOLD
OSM-1-159-161	2083	3125	1.0	SILVER	NIL