


OSM-4-150 Series SPRING MOUNTS 1" Deflection

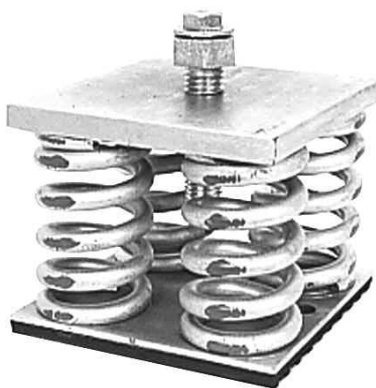

OSM Series spring mounts are unboxed, laterally stable steel springs welded to the top and bottom steel plates. The upper load plate includes a leveling bolt assembly. The lower steel plate features a neoprene acoustical friction pad. Mounting holes are provided on all mounts. These spring mounts have a built leveling device. Springs are galvanized for long operation life without any rusting problems and are color coded for easy field identification. Springs have a 50%

additional travel to solid load as per **ASHRAE** recommendations. These spring mounts are recommended where both horizontal and vertical stability are required. In general these series spring mounts are used for vibration & noise control applications such as pumps, centrifugal fans, air handling units, air compressors and for similar

applications.

ISOLATOR MODEL	RATED LOAD (LBS)	SOLID LOAD (LBS)	DEFLECTION AT SOLID LOAD (INCH)	COLOR	
				MAIN	STRIPE
OSM-4-150	332	500	1.3	SILVER	BROWN
OSM-4-151	600	900	1.3	SILVER	ORANGE
OSM-4-152	864	1300	1.2	SILVER	GREEN
OSM-4-153	1200	1800	1.2	SILVER	RED
OSM-4-154	1600	2400	1.2	SILVER	BLACK
OSM-4-155	2000	3000	1.1	SILVER	WHITE
OSM-4-156	2400	3600	1.0	SILVER	GRAY
OSM-4-157	2932	4400	0.9	SILVER	BLUE
OSM-4-158	4800	7200	1.0	SILVER	GOLD
OSM-4-159	6664	10000	1.0	SILVER	NIL
OSM-4-150-161	1924	2888	1.0	SILVER	BROWN
OSM-4-151-161	2128	3196	1.0	SILVER	ORANGE
OSM-4-152-161	2388	3584	1.0	SILVER	GREEN
OSM-4-153-161	2664	4000	1.0	SILVER	RED
OSM-4-154-161	3000	4500	1.0	SILVER	BLACK
OSM-4-155-161	3484	5228	1.0	SILVER	WHITE
OSM-4-156-161	4064	6100	1.0	SILVER	GRAY
OSM-4-157-161	4432	6652	0.9	SILVER	BLUE
OSM-4-158-161	6464	9700	1.0	SILVER	GOLD
OSM-4-159-161	8332	12500	1.0	SILVER	NIL