



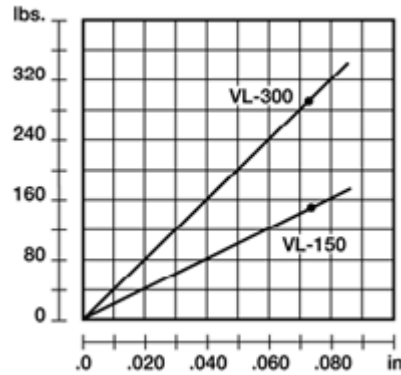

VL Series LEVELING FEET

These mounts are ideal for a wide range of light duty applications where simple, precise leveling is required. Diamond cell neoprene pads provide a firm footing and can compensate for slight unevenness in the floor.

LOADS VS. DEFLECTION:

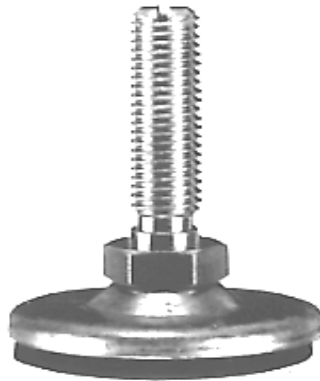

FEATURES:

- Fast, simple and precise leveling for all types of machinery
- Controls vibration, shock and noise
- Neoprene provides the necessary resilience for vibration absorption
- Resistant to oil and cleaning compounds
- Save on installation costs, no cementing required
- Meets OSHA requirements for anchoring machinery
- Economical and can be reused when relocating or on other machines
- Zinc plated to provide corrosion resistance

Type	Maximum load in lbs		Level Adjustment	Thread	Mount Dimensions (ins)		
	Non-Impact Machinery	Impact Machinery			D	H	h
VL-150-10	150	75	1"	3/8-16	2	3	1"
VL-150-12	150	75	1"	1/2-13	2	3	1"
VL-150-M12	150	75	1"	M12	2	3	1"
VL-300-10	300	150	1"	3/8-16	2	3	1"
VL-300-12	300	150	1"	1/2-13	2	3	1"
VL-300-M12	300	150	1"	M12	2	3	1"